

KART.ONE
THEPALLETBOX

FACTSHEET


KARTON
E
WWW.KART.ONE

hej




KART.ONE THEPALLETBOX

FACTSHEET 80x120x195



SIZE	VOLUME	WEIGHT
L x W x H in mm outside 1214 x 814 x 1954 insight 1200x800x 940	1.651 l - 1.872 l	5500 g

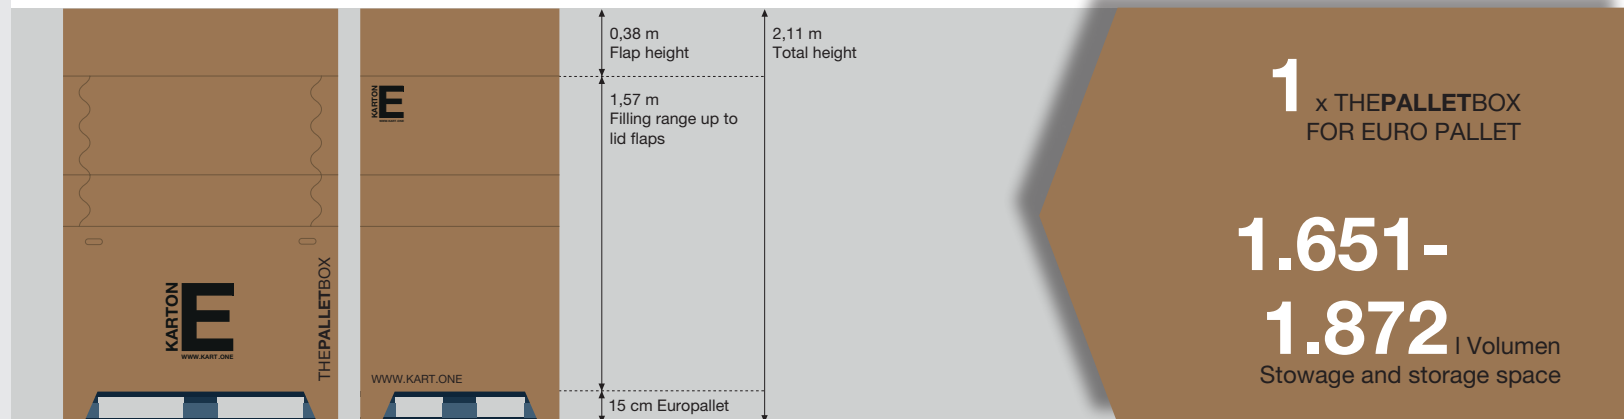


THEPOPUPBOX is made of corrugated cardboard - a material that is completely renewable raw materials and can be completely recycled. The boxes can simply be disposed of in the waste paper. Recycling used packaging to produce new corrugated cardboard delays the return of CO₂ to the atmosphere.

80 %
Recycled material

20 % Fresh fibres

 **Pallet dimension**
2,30 x 2,05 x 2,26 m
(L x W x H)

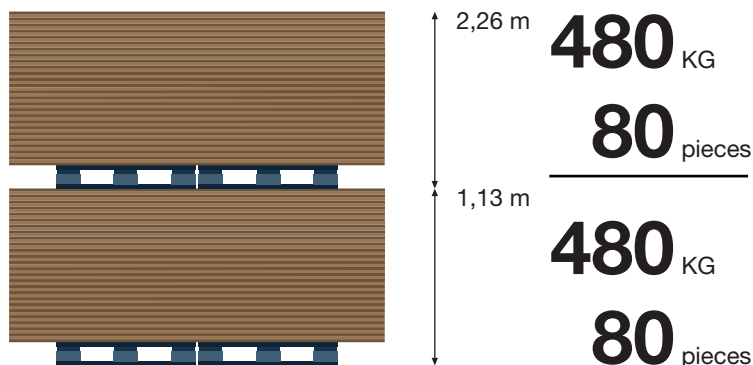

Delivery is flat, on double pallets (230 x 205 cm). Double pallets are stackable. Transport: max. 2 pallets, Storage: max. 4 pallets on top of each other). For storage and processing we recommend 15-25 degrees Celsius and 45 - 65 % relative humidity.

Typ: Corrugated cardboard
 Sorte: BC415 brown
 Stärke: approx 5 mm
 ECT: 9,80 kN/m (edge crush)
 1800 kN/m (burst strength)

KART.ONE THEPALLETBOX

FACTSHEET 80x120x195



The THEPALLETBOX is very easy to assemble with just a few handles and can be placed on a pallet.




The loading flap is provided with a wave cut. This means it can be closed again after or during loading and the flap does not fall down.

When opened, the pallet container has a filling height of 1.95 metres. When the lid flaps are closed, it can be filled up to a filling height of 1.57 metres.

The lid flaps have a height of 38 cm and are used to correct the height of lower transport vehicles, for example. They do not close completely.

The hinged base closes almost completely. This prevents small consignments from falling through or sliding out.

- Patented fixing aid for packaging film
- Loading flap with wave cut
- Two handles on each two sides
- Folding base for more stability

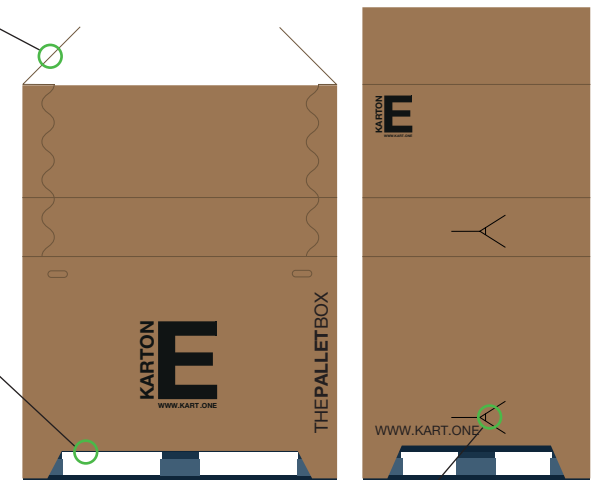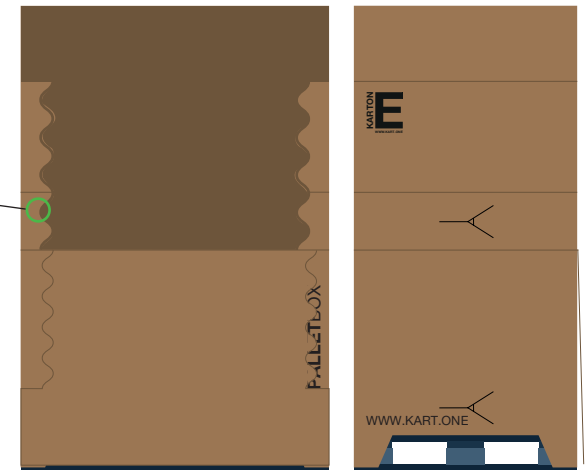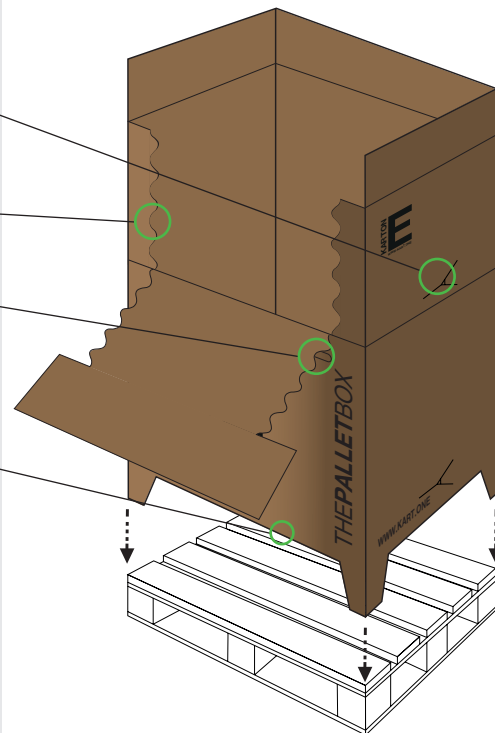

The THEPALLETBOX has a patented Y-shaped fixing device on the right-hand side and rear of the pallet container.

One just above the floor, another halfway up above the loading flap.

This is used to secure the packaging film (stretch film) during manual or machine wrapping.

This makes it easier to wrap the pallets/packaging material and saves time.

KART.ONE
THEPALLETBOX

FACTSHEETS



thanks

KART.ONE

Am Pfahlgraben 4-10
D-35415 Pohlheim
info@kart.one

